



# High Colour Temperature

# MR16-3400K MR16-4200K

## EYE DICHO-COOL Halogen

The MR16-3400K lamp is perfectly suited for merchandising or colour matching to the light of other light sources and technologies, accenting and enhancing the appearance of furnishings and fabrics.

The MR16-4200K's special optic properties provide a cool blue-white colour which is ideal for displaying highly reflective merchandise such as glassware, jewellery and fine china.

Broad selection of MR16 3400K and 4200K products are excellent choices for matching, and use with fluorescent and HID light sources.

Direct replacement for standard MR16 12V 2-Pin base.

Available with UV-Cut lens to reduce fading of displayed object.

Long life... 10,000 hour life lamp is available.



## APPLICATIONS

### Commercial

- Museums
- Lounges
- Offices
- Retail
- Jewellery stores
- Restaurants
- Display cases

### Residential

- Homes
- Landscape

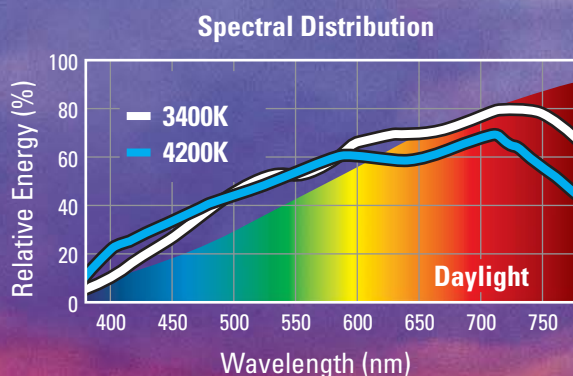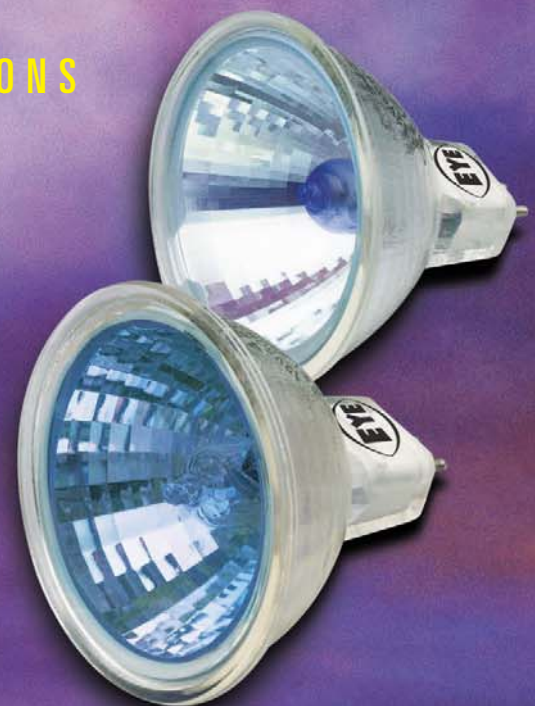




# High Colour Temperature

# MR16-3400K MR16-4200K

## EYE DICHO-COOL Halogen

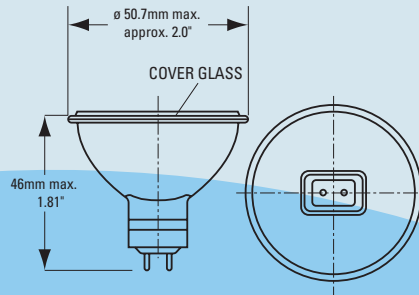


Watts (W)	Volts (V)	Base	Product Description	Product Comparison Guide	Case Qty.	Ctr. Beam Intensity (cd)	Beam Angle (°)	Average Life Hours	Colour Temp. (K)	Filament
<b>MR16-3400K with Cover Glass</b>										
20	12	GU5.3	JR1251D	20MR16CG/10°/3350K/ESX	12	2200	10	4000	3350	C-6
20	12	GU5.3	JR1253D	20MR16CG/36°/3350K/BAB	12	400	36	4000	3350	C-6
35	12	GU5.3	JR1351D	35MR16CG/12°/3450K/FRB	12	4200	12	5000	3450	C-6
35	12	GU5.3	JR1353D	35MR16CG/36°/3450K/FMW	12	880	36	5000	3450	C-6
50	12	GU5.3	JR1551D	50MR16CG/12°/3450K/EXT	12	5300	12	5000	3450	C-6
50	12	GU5.3	JR1552D	50MR16CG/26°/3450K/EXZ	12	2250	26	5000	3450	C-6
50	12	GU5.3	JR1554D	50MR16CG/36°/3450K/EXN	12	1300	36	5000	3450	C-6

### New-MR16-3400K with UV-Cut Cover Glass 10,000 hours life

20	12	GU5.3	JR8272	20MR16CG/UV/C/23°/3350K/10000H/BBF	12	530	23	10000	3350	C-6
35	12	GU5.3	JR8371	35MR16CG/UV/C/12°/3450K/10000H/FRB	12	4200	12	10000	3450	C-6
35	12	GU5.3	JR8372	35MR16CG/UV/C/23°/3450K/10000H/FRA	12	1400	23	10000	3450	C-6
35	12	GU5.3	JR8373	35MR16CG/UV/C/36°/3450K/10000H/FMW	12	880	36	10000	3450	C-6
50	12	GU5.3	JR8571	50MR16CG/UV/C/12°/3450K/10000H/EXT	12	5300	12	10000	3450	C-6
50	12	GU5.3	JR8572	50MR16CG/UV/C/25°/3450K/10000H/EXZ	12	2250	25	10000	3450	C-6
50	12	GU5.3	JR8574	50MR16CG/UV/C/36°/3450K/10000H/EXN	12	1300	36	10000	3450	C-6

### MR16-4200K with Cover Glass

20	12	GU5.3	JR1256	20MR16CG/38°/4200K/BAB	12	220	38	4000	4200	C-6
35	12	GU5.3	JR1356	35MR16CG/38°/4200K/FMW	12	500	38	5000	4200	C-6
50	12	GU5.3	JR1580	50MR16CG/38°/4200K/EXN	12	840	38	5000	4200	C-6
50	12	GU5.3	JR1581	50MR16CG/56°/4200K/FNV	12	300	56	5000	4200	C-6

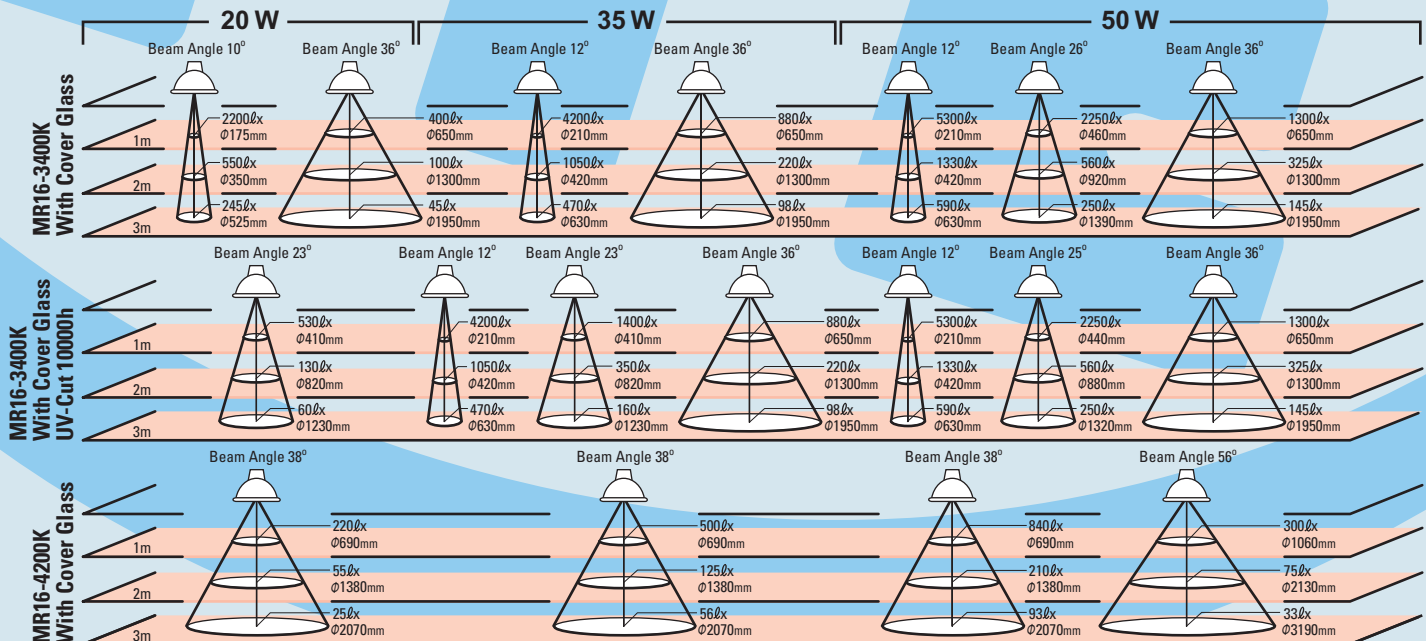

- Burning Position : Any.
- All information subject to change without notice.



Iwasaki Electric Co., Ltd.

12-4, Shiba 3-chome, Minato-ku, Tokyo 105-0014, Japan

Tel: +81-3-3454-1841 Fax: +81-3-3454-1974 E-mail: iwasaki-ibd@eye.co.jp www.eye.co.jp