


EYE Cera Arc 220W/360W

(For use with Mercury ballast with ignitor.)

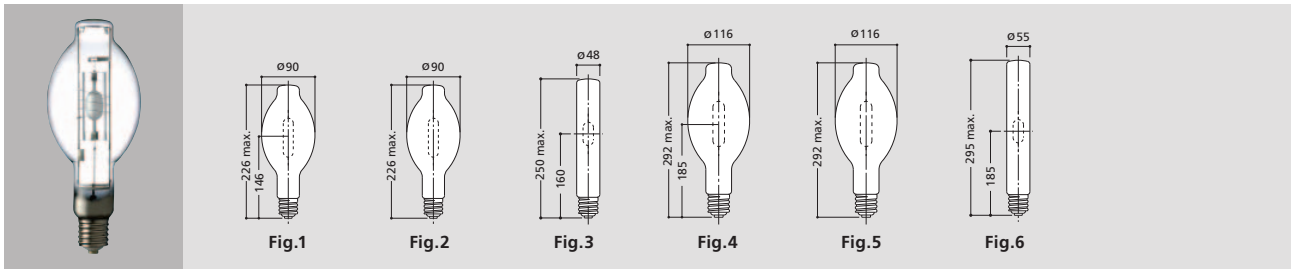

PHYSICAL DATA AND CHARACTERISTICS

Type	Watts (W)	Bulb	Base	Bulb Finish	Std. Pkg. Qty.	Colour Temp. (K)	Lamp		Initial Lumens (lm)	Ra	Rated Av. Life (hrs)	Burning Position	Fig. No.
							Voltage (V)	Current (A)					
EYE Cera Arc BT Protected E40 base operates on 250W mercury/metal halide ballast with ignitor													
CM220/W/BUD	235	BT90	E40	Clear	12	4100	130	2.13	23000	85	20000	BUD ± 15°	1
CM220F/W/BUD	235	BT90	E40	Coated	12	4100	130	2.13	22000	85	20000	BUD ± 15°	2
EYE Cera Arc T E40 base operates on 250W mercury/metal halide ballast with ignitor													
CMT220/W/BH	235	T48	E40	Clear	12	4100	130	2.13	19800	85	15000	BH ± 15°	3
EYE Cera Arc BT Protected E40 base operates on 400W mercury/metal halide ballast with ignitor													
CM360/W/SH/BUD	375	BT116	E40	Clear	12	4100	135	3.25	44000	80	20000	BUD ± 15°	4
CM360F/W/SH/BUD	375	BT116	E40	Coated	12	4100	135	3.25	42000	80	20000	BUD ± 15°	5
EYE Cera Arc T E40 base operates on 400W mercury/metal halide ballast with ignitor													
CMT360/W/BH	375	T55	E40	Clear	12	4100	135	3.25	33800	85	15000	BH ± 15°	6

Ceramic metal halide for use with reactor type ballast 250/400W for mercury with ignitor. Direct replacement for standard metal halide lamps.

Features

- Saves approximately 5 to 10% system wattage consumption per socket.
- High efficacy and highly maintained lumens support energy saving by reducing the number of fixtures required to achieve design lumens.
- Ra≥80, high colour rendering makes installations more productive and attractive with reduced color shift and imperceptible lamp to lamp colour variation.
- Shrouded, "protected" design makes it possible to use in fixtures without glass front providing a low cost, high performance fixture.
- UV reduction coating on outer bulb prevents lit objects from fading and maintains high output with polycarbonate lenses.

Notes:

Warning / Caution notices: page 35
Operating Instruction: page 35

Stay bright with high lumen maintenance

Keeps brighter longer with 75% maintained lumens at the end of lamp life.

