


EYE CERA ARC TP, T, BT -screw base-

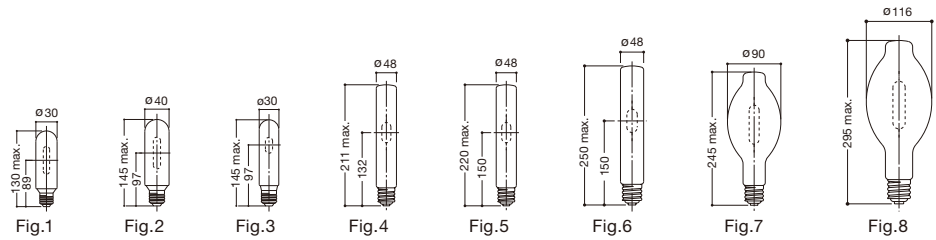

PHYSICAL DATA AND CHARACTERISTICS

Type	Watts (W)	Bulb	Base	Bulb Finish	Std. Pkg. Qty.	Colour Temp. (K)	Lamp		Initial Lumens (lm)	Ra	Rated Av. Life (hrs)	Burning Position	Fig. No.	Ref.*
							Voltage (V)	Current (A)						
EYE CERA ARC TP - Tubular Protected E27 screw base														
CMT35/LW	39	T30	E27	Clear	12	3000	85	0.46	3150	90	12000	Any	1	ECG
CMT35F/LW	39	T30	E27	Diffused	12	3000	85	0.46	3000	90	12000	Any	1	ECG
CMT35/DW	39	T30	E27	Clear	12	3200	85	0.46	3150	83	12000	Any	1	ECG
CMT35D/DW	39	T30	E27	Diffused	12	3200	85	0.46	3000	83	12000	Any	1	ECG
CMT35/W	39	T30	E27	Clear	12	4200	85	0.46	3150	90	12000	Any	1	ECG
CMT35F/W	39	T30	E27	Diffused	12	4200	85	0.46	3000	90	12000	Any	1	ECG
CMT70/DW	70	T30	E27	Clear	12	3200	90	0.95	6700	90	12000	Any	1	
CMT70F/DW	70	T30	E27	Diffused	12	3200	90	0.95	6500	90	12000	Any	1	
CMT70/WW	70	T30	E27	Clear	12	3500	90	0.95	7000	90	12000	Any	1	
CMT70F/WW	70	T30	E27	Diffused	12	3500	90	0.95	6800	90	12000	Any	1	
CMT70/W	70	T30	E27	Clear	12	4200	90	0.95	6700	90	12000	Any	1	
CMT70F/W	70	T30	E27	Diffused	12	4200	90	0.95	6500	90	12000	Any	1	
CMT150/DW	150	T40	E27	Clear	12	3200	95	1.90	15000	95	12000	Any	2	
CMT150F/DW	150	T40	E27	Diffused	12	3200	95	1.90	14400	95	12000	Any	2	
CMT150/WW	150	T40	E27	Clear	12	3500	95	1.90	15000	95	12000	Any	2	
CMT150F/WW	150	T40	E27	Diffused	12	3500	95	1.90	14400	95	12000	Any	2	
CMT150/W	150	T40	E27	Clear	12	4200	95	1.90	15000	95	12000	Any	2	
CMT150F/W	150	T40	E27	Diffused	12	4200	95	1.90	14400	95	12000	Any	2	
EYE CERA ARC High Efficacy and Dimmable TP - Tubular Protected E27 screw base														
CMT150/DW/SH	150	T30	E27	Clear	12	3200	90	1.67	15000	90	21000	Any	3	ECG
CMT150F/DW/SH	150	T30	E27	Diffused	12	3200	90	1.67	14400	90	21000	Any	3	ECG
CMT150/WW/SH	150	T30	E27	Clear	12	3500	90	1.67	15000	92	21000	Any	3	ECG
CMT150F/WW/SH	150	T30	E27	Diffused	12	3500	90	1.67	14400	92	21000	Any	3	ECG
CMT150/W/SH	150	T30	E27	Clear	12	4200	90	1.67	15000	92	21000	Any	3	ECG
CMT150F/W/SH	150	T30	E27	Diffused	12	4200	90	1.67	14400	92	21000	Any	3	ECG
EYE CERA ARC T - Tubular E40 operates on ballast for 150W high pressure sodium														
CMT150/LW/HOR/E40	150	T48	E40	Clear	12	3000	100	1.80	16000	83	12000	BH±15°	4	
CMT150/W/HOR/E40	150	T48	E40	Clear	12	4100	100	1.80	15500	92	12000	BH±15°	4	
EYE CERA ARC TP - Tubular Protected E40 screw base operates on Iwasaki electronic ballast														
CMT250/W/BUD/2	250	T48	E40	Clear	12	4100	100	3.00	23800	90	12000	BU/BD±60°	5	ECG
CMT400/W/BUD	400	T48	E40	Clear	12	4100	100	4.70	38000	90	12000	BU/BD±60°	6	ECG
EYE CERA ARC BT - BT Protected E40 screw base operates on Iwasaki electronic ballast														
CM250FCE-W/BUD/2	250	BT90	E40	Diffused	12	4100	100	3.00	22500	90	12000	BU/BD±60°	7	ECG
CM400FCE-W/BUD	400	BT116	E40	Diffused	12	4100	100	4.70	36000	90	12000	BU/BD±60°	8	ECG

* Lamps marked ECG in the Ref. column must be used with electronic ballasts manufactured by or approved by Iwasaki Electric to ensure correct operation.

Screw base, high colour rendering ceramic metal halide lamp.

TP: Tubular "Protected" bulb with E27 type fits a wide variety of applications such as façade lighting, wall wash lighting.

The protected lamps can be used without glass cover.

FEATURES

- Clear and frosted bulbs are available.
- UV reduction coating on outer bulb prevents lit objects from fading and maintains high output with polycarbonate lenses.