
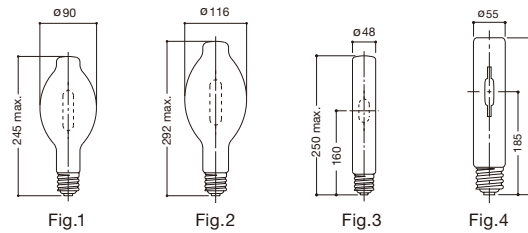


EYE CERA ARC 220W, 360W

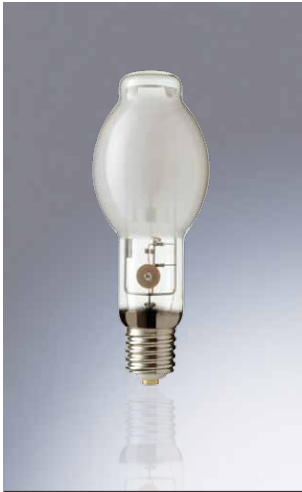

PHYSICAL DATA AND CHARACTERISTICS

Type	Watts (W)	Bulb	Base	Bulb Finish	Std. Pkg. Qty.	Colour Temp. (K)	Lamp		Initial Lumens (lm)	Ra	Rated Av. Life (hrs)	Burning Position	Fig. No.	Ref.
							Voltage (V)	Current (A)						
EYE CERA ARC 220W/360W BT Protected - E40 screw base / with UV cut coating														
CM220/W/BUD	235	BT90	E40	Clear	12	4100	130	2.13	23000	85	24000	BU/BD±15°	1	1
CM220F/W/BUD	235	BT90	E40	Diffused	12	4100	130	2.13	22000	85	24000	BU/BD±15°	1	1
CM360/W/SH/BUD	375	BT116	E40	Clear	12	4100	135	3.25	44000	80	24000	BU/BD±15°	2	1
CM360F/W/SH/BUD	375	BT116	E40	Diffused	12	4100	135	3.25	42000	80	24000	BU/BD±15°	2	1
EYE CERA ARC 220W/360W T E40 screw base / with UV cut coating														
CMT220/W/BH	235	T48	E40	Clear	12	4100	130	2.13	19800	85	21000	BH±15°	3	1
CMT360/W/BH	375	T55	E40	Clear	12	4100	135	3.25	33800	85	21000	BH±15°	4	1
EYE CERA ARC ACE 220W/360W BT Protected - E40 screw base / with UV cut coating														
CM220LS/W/BUD	235	BT90	E40	Clear	12	4100	130	2.13	23000	85	24000	BU/BD±15°	1	2
CM220FLS/W/BUD	235	BT90	E40	Diffused	12	4100	130	2.13	22000	85	24000	BU/BD±15°	1	2
CM360LS/W/SH/BUD	375	BT116	E40	Clear	12	4100	135	3.25	44000	80	24000	BU/BD±15°	2	2
CM360FLS/W/SH/BUD	375	BT116	E40	Diffused	12	4100	135	3.25	42000	80	24000	BU/BD±15°	2	2
EYE CERA ARC ACE 220W/360W T E40 screw base / with UV cut coating														
CMT220LS/W/BH	235	T48	E40	Clear	12	4100	130	2.13	19800	85	21000	BH±15°	3	2
CMT360LS/W/BH	375	T55	E40	Clear	12	4100	135	3.25	33800	85	21000	BH±15°	4	2

Lamps marked "1" in the Ref. column should be operated on a reactor type ballast for MVL with ignitor.
Lamps marked "2" in the Ref. column should be operated on a reactor type ballast for MVL without ignitor.

Ceramic metal halide lamp for use with a reactor type ballast.
Direct replacement for standard metal halide lamps or high pressure mercury lamps.

FEATURES

- Saves 5 to 10% system wattage consumption per socket.
- High efficacy and highly maintained lumens support energy saving by reducing the number of luminaires required to achieve design lumens.
- Ra80-85, high colour rendering makes installations more productive and attractive with reduced colour shift and imperceptible lamp to lamp colour variation.
- Shrouded "Protected" design makes it possible to use in luminaires without glass front providing with low cost, high performance luminaires.
- UV reduction coating on outer bulb prevents lit objects from fading and maintains high output with polycarbonate lenses.



Komatsu Factory, Ibaraki