


# Single ended JC G4, G6.35, GY6.35

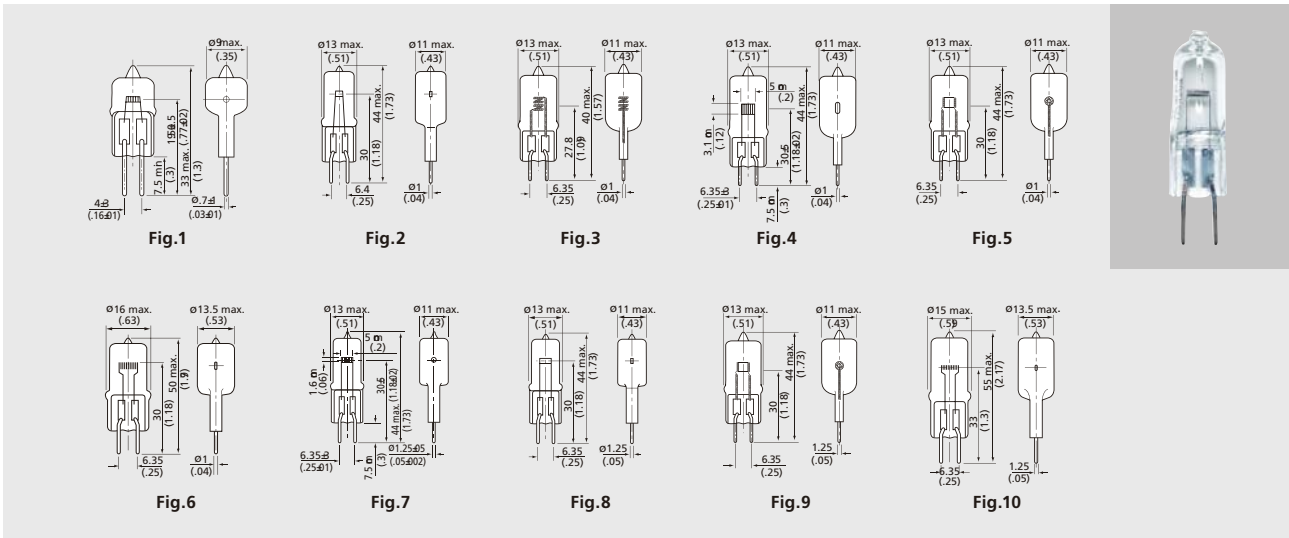

## PHYSICAL DATA AND CHARACTERISTICS

Type	Volts (V)	Watts (W)	Std. Pkg. Qty	Approx. Initial Lumens (lm)	Colour Temp. (K)	Rated Av. Life (hrs)	Dimensions (mm)			Base	Filament	Fig. No.
							M.D.	M.O.L.	L.C.L.			
<b>Miniature 2 pin base - G4</b>												
JC6V10W20H/G4	6	10	40	140	2850	2000	9.0	33	19.5	G4	C-6	1
JC6V20W20H/G4	6	20	40	300	2850	2000	9.0	33	19.5	G4	C-6	1
JC12V20W20H/G4	12	20	40	330	2850	2000	9.0	33	19.5	G4	C-6	1
<b>2 pin base - G6.35</b>												
JC12V20W20H/G1	12	20	20	280	2850	2000	11.0	44	30	G6.35	C-6	2
JC12V30W20H/G1	12	30	20	470	2900	2000	11.0	44	30	G6.35	C-6	2
JC12V35W20H/G1	12	35	20	560	2900	2000	11.0	44	30	G6.35	C-6	2
JC12V50W20H/G1	12	50	20	950	3000	2000	11.0	44	30	G6.35	C-6	2
JCD24V55W10H/G1	24	55	20	990	3000	1000	11.0	40	27.8	G6.35	CC-8	3
JC12V75W20H/G1	12	75	20	1420	3000	2000	11.0	44	30	G6.35	C-Bar-6	4
JC12V100W20H/G1	12	100	20	2100	3000	2000	11.0	44	30	G6.35	C-Bar-6	4
JCD24V100W20H/G1	24	100	20	1800	2900	2000	11.0	44	30	G6.35	CC-6	5
JC24V150W10H/G1	24	150	20	3450	3100	1000	13.5	50	30	G6.35	C-Bar-6	6
JC24V150W20H/G1	24	150	20	3000	3000	2000	13.5	50	30	G6.35	C-Bar-6	6
JC24V200W20H/G1	24	200	20	4400	3000	2000	13.5	50	30	G6.35	C-Bar-6	6
<b>2 pin base - GY6.35</b>												
JC12V35W20H/G2	12	35	20	560	2900	2000	11.0	44	30	GY6.35	C-6	7
JC12V50W20H/G2	12	50	20	950	3000	2000	11.0	44	30	GY6.35	C-6	7
JC12V75W20H/G2	12	75	20	1420	3000	2000	11.0	44	30	GY6.35	C-Bar-6	8
JCD24V75W20H/G2	24	75	20	1350	2900	2000	11.0	44	30	GY6.35	CC-6	9
JC12V100W20H/G2	12	100	20	2100	3000	2000	11.0	44	30	GY6.35	C-Bar-6	8
JCD24V100W20H/G2	24	100	20	1800	2900	2000	11.0	44	30	GY6.35	CC-6	9
JC24V250W20H/G2	24	250	20	5750	3000	2000	13.5	55	33	GY6.35	C-Bar-6	10
JC24V300WG2	24	300	20	9900	3400	50	13.5	55	33	GY6.35	C-Bar-6	10

Notes: • Burning Position: Any