


Double ended

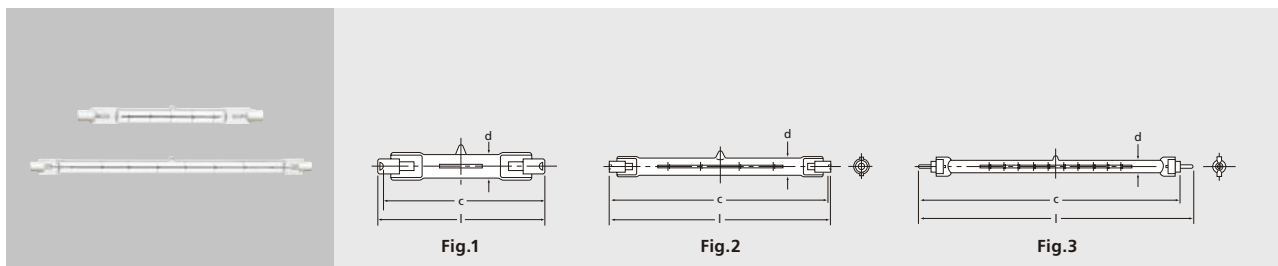

PHYSICAL DATA AND CHARACTERISTICS

Type	Volts (V)	Watts (W)	Approx. Initial Lumens (lm)	Colour Temp. (K)	Rated Av. Life (hrs)	Dimensions (mm)			Base	Filament	Fig. No. & Remarks
						M.D. d	C.to B.E. c	M.O.L. l			
J100W-S	220/230	100	1350	2750	2000	9.0	78.3	80.3	R7s	CC-8	1
	240/250	100	1350	2750	2000	9.0	78.3	80.3	R7s	CC-8	1
J150W-S	220/230	150	2100	2800	2000	9.0	78.3	80.3	R7s	CC-8	1
	240/250	150	2100	2800	2000	9.0	78.3	80.3	R7s	CC-8	1
J200W-S	220/230	200	3000	2800	2000	9.0	78.3	80.3	R7s	CC-8	1
	240/250	200	3000	2800	2000	9.0	78.3	80.3	R7s	CC-8	1
J250W-S	220/230	250	4000	2850	2000	9.0	78.3	80.3	R7s	CC-8	1
	240/250	250	4000	2850	2000	9.0	78.3	80.3	R7s	CC-8	1
J150W	220/230	150	2100	2800	2000	9.0	117.6	118.6	R7s	C-8	2
	240/250	150	2100	2800	2000	9.0	117.6	118.6	R7s	C-8	2
J200W	220/230	200	3200	2800	2000	9.0	117.6	118.6	R7s	C-8	2
	240/250	200	3200	2800	2000	9.0	117.6	118.6	R7s	C-8	2
J250W	220/230	250	4000	2800	2000	9.0	117.6	118.6	R7s	C-8	2
	240/250	250	4000	2800	2000	9.0	117.6	118.6	R7s	C-8	2
J300W	220/230	300	5000	2850	2000	9.0	117.6	118.6	R7s	C-8	2
	240/250	300	5000	2850	2000	9.0	117.6	118.6	R7s	C-8	2
J500W	220/230	500	9500	2900	2000	9.0	117.6	118.6	R7s	C-8	2
	240/250	500	9500	2900	2000	9.0	117.6	118.6	R7s	C-8	2
J500W-L	220/230	500	8750	2900	2000	11.0	189.1	190.1	R7s	C-8	2
	240/250	500	8750	2900	2000	11.0	189.1	190.1	R7s	C-8	2
J750W	220/230	750	15000	3000	2000	11.0	189.1	190.1	R7s	C-8	2
	240/250	750	15000	3000	2000	11.0	189.1	190.1	R7s	C-8	2
J1000W	220/230	1000	21000	3000	2000	11.0	189.1	190.1	R7s	C-8	2
	240/250	1000	21000	3000	2000	11.0	189.1	190.1	R7s	C-8	2
J1000W-L	220/230	1000	21000	3000	2000	11.0	254.1	255.1	R7s	C-8	2
	240/250	1000	21000	3000	2000	11.0	254.1	255.1	R7s	C-8	2
J1500W	220/230	1500	33000	3000	2000	11.0	254.1	255.1	R7s	C-8	2
	240/250	1500	33000	3000	2000	11.0	254.1	255.1	R7s	C-8	2
J2000W	220/230	2000	44000	3000	2000	11.0	332.1	333.1	R7s	C-8	2
	240/250	2000	44000	3000	2000	11.0	332.1	333.1	R7s	C-8	2
J2000W/Fa4	220/230	2000	44000	3000	2000	11.0	—	334.4	Fa4	C-8	3
	240/250	2000	44000	3000	2000	11.0	—	334.4	Fa4	C-8	3

Notes: • Burning position: Horizontal $\pm 5^\circ$