


Projection/Optical Single ended G6.35, GY6.35 base

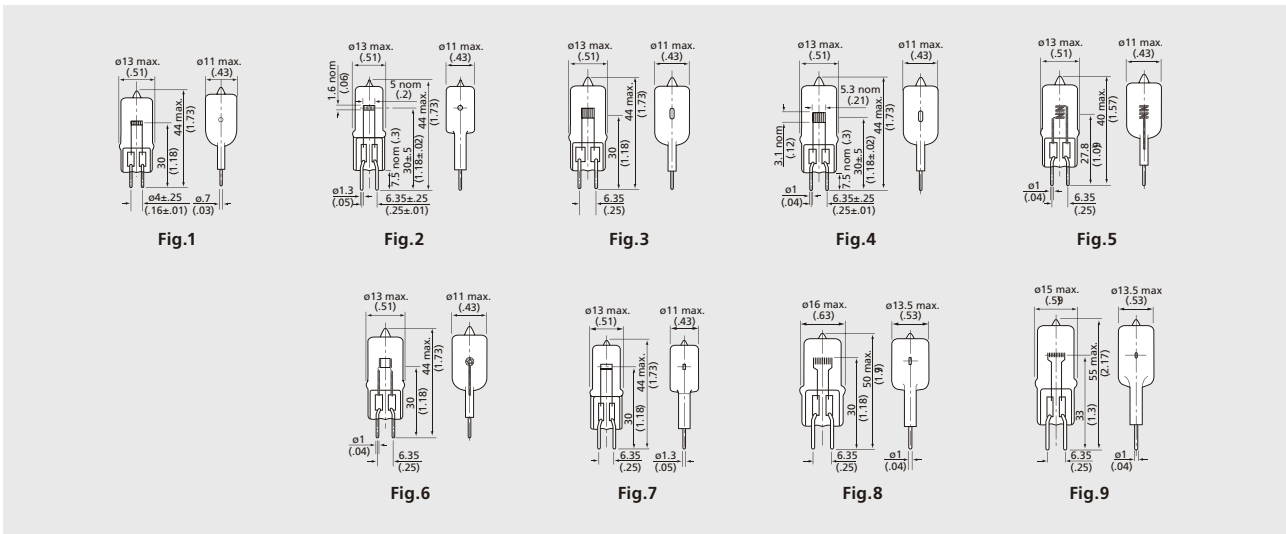

PHYSICAL DATA AND CHARACTERISTICS

Type	ANSI Ref.	Volts (V)	Watts (W)	Approx. Initial Lumens (lm)	Colour Temp. (K)	Std. Pkg. Qty	Rated Av. Life (hrs)	Dimensions mm (in)			Filament	Fig. No.
								M.D.	M.O.L.	L.C.L.		
Glass 2 pin base - G6.35												
JC12V20W20H/G1	—	12	20	280	2850	20	2000	11.0 (.4)	44 (1.8)	30 (1.2)	C-6	1
JC12V35W20H/G1	—	12	35	560	2900	20	2000	11.0 (.4)	44 (1.8)	30 (1.2)	C-6	1
JC12V50W20H/G1	—	12	50	950	3000	20	2000	11.0 (.4)	44 (1.8)	30 (1.2)	C-6	1
JCD24V55W10H/G1	—	24	55	990	3000	20	1000	11.0 (.4)	44 (1.8)	27.8 (1.1)	CC-8	5
JCD24V75W20H/G1	—	24	75	1420	3000	20	2000	11.0 (.4)	44 (1.8)	30 (1.2)	CC-6	6
JC12V100W20H/G1	—	12	100	2100	3000	20	2000	11.0 (.4)	44 (1.8)	30 (1.2)	C-Bar-6	4
JCD24V100W20H/G1	—	24	100	1800	3000	20	2000	11.0 (.4)	44 (1.8)	30 (1.2)	CC-6	6
JC24V150W10H/G1	—	24	150	3450	3100	20	1000	13.5 (.6)	50 (2.0)	30 (1.2)	C-Bar-6	8
JC24V150W20H/G1	—	24	150	3000	3000	20	2000	13.5 (.6)	50 (2.0)	30 (1.2)	C-Bar-6	8
JC24V200W20H/G1	—	24	200	4400	3000	20	2000	13.5 (.6)	50 (2.0)	30 (1.2)	C-Bar-6	8
JC24V250W3H/G1	M33	24	250	6750	3300	20	300	13.5 (.6)	55 (2.2)	33 (1.3)	C-Bar-6	9
Glass 2 pin base - GY6.35												
JC12V20W20H/G2	—	12	20	280	2850	20	2000	11.0 (.4)	44 (1.8)	30 (1.2)	C-6	2
JC12V35W20H/G2	—	12	35	560	2900	20	2000	11.0 (.4)	44 (1.8)	30 (1.2)	C-6	2
JC12V50W20H/G2	M32	12	50	950	3000	20	2000	11.0 (.4)	44 (1.8)	30 (1.2)	C-Bar-6	3
JCD24V75W20H/G2	—	24	75	1350	2900	20	1000	11.0 (.4)	44 (1.8)	30 (1.2)	CC-6	6
JC12V100W10H/G2	—	12	100	2450	3100	20	1000	11.0 (.4)	44 (1.8)	30 (1.2)	C-Bar-6	7
JC12V100W20H/G2	M28	12	100	2100	3000	20	2000	11.0 (.4)	44 (1.8)	30 (1.2)	C-Bar-6	7
JC24V250W20H/G2	M36	24	250	5750	3000	20	2000	13.5 (.6)	55 (2.2)	33 (1.3)	C-Bar-6	9

Notes: • Burning Position: Universal