


Projection/Optical Single ended line voltage G6.35, G6.35-1.5 base

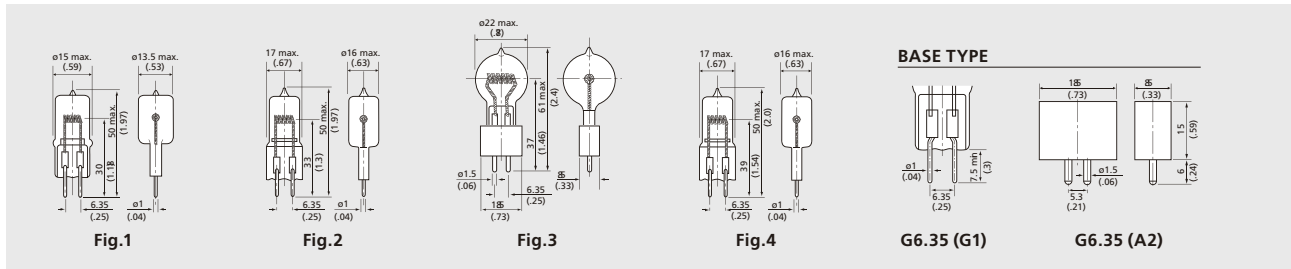

PHYSICAL DATA AND CHARACTERISTICS

| Type | ANSI Ref. | Volts (V) | Watts (W) | Approx. Initial Lumens (lm) | Colour Temp. (K) | Std. Pkg. Qty | Rated Av. Life (hrs) | Dimensions mm (in) | | | Filament | Fig. No. |
|--|-----------|-----------|-----------|-----------------------------|------------------|---------------|----------------------|--------------------|----------|----------|----------|----------|
| | | | | | | | | M.D. | M.O.L. | L.C.L. | | |
| Line voltage glass 2 pin base - G6.35 | | | | | | | | | | | | |
| JCD150WL/G1 | — | 120 | 150 | 3300 | 3100 | 20 | 300 | 13.5 (.5) | 50 (2.0) | 30 (1.2) | CC-6 | 1 |
| JCD150W-S/G1 | — | 120 | 150 | 4050 | 3250 | 20 | 50 | 13.5 (.5) | 50 (2.0) | 30 (1.2) | CC-6 | 1 |
| JCD200WL/G1 | — | 120 | 200 | 4400 | 3100 | 20 | 300 | 15.5 (.6) | 50 (2.0) | 39 (1.5) | CC-6 | 4 |
| JCD250WL/G1 | — | 120 | 250 | 5750 | 3100 | 20 | 300 | 15.5 (.6) | 50 (2.0) | 33 (1.3) | CC-6 | 2 |
| JCD250W-S/G1 | — | 120 | 250 | 7000 | 3300 | 20 | 50 | 16.0 (.6) | 50 (2.0) | 33 (1.3) | CC-6 | 2 |
| JCD300WL/G1 | DRA | 120 | 300 | 6900 | 3100 | 20 | 300 | 15.0 (.6) | 50 (2.0) | 33 (1.3) | CC-6 | 2 |
| JCD300W-S/G1 | — | 120 | 300 | 8400 | 3250 | 20 | 50 | 16.0 (.6) | 50 (2.0) | 33 (1.3) | CC-6 | 2 |
| Line voltage glass 2 pin base - G6.35-1.5 | | | | | | | | | | | | |
| JCD500WC/A2 | — | 120 | 500 | 14000 | 3200 | 20 | 75 | 22.0 (.9) | 61 (2.4) | 37 (1.5) | CC-6 | 3 |

Notes: • Burning Position: Universal