


EYE Sunlux Super

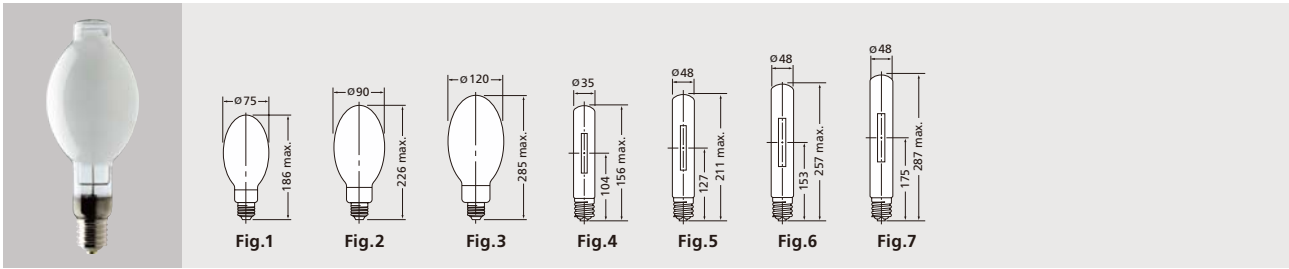

PHYSICAL DATA AND CHARACTERISTICS

Type	Watts (W)	Bulb	Base	M.O.L. (mm)	L.C.L. (mm)	Lamp		Approx. Initial Lumens (lm)	Rated Av. Life (hrs)	Fig. No.
						Voltage (V)	Current (A)			
E bulb Diffuse										
NH100FS	100	E75	E40	186	—	100	1.20	9500	24000	1
NH150FS	150	E90	E40	226	—	100	1.80	15500	24000	2
NH250FS	250	E90	E40	226	—	100	3.00	30000	24000	2
NH400FS	400	E120	E40	285	—	105	4.45	53000	24000	3
Tubular										
NHT50S	50	T35	E27	156	104	85	0.76	4000	16000	4
NHT70S	70	T35	E27	156	104	90	0.98	6500	16000	4
NHT100S	100	T48	E40	211	127	100	1.20	10000	24000	5
NHT150S	150	T48	E40	211	127	100	1.80	16000	24000	5
NHT250S	250	T48	E40	257	153	100	3.00	33000	24000	6
NHT400S	400	T48	E40	287	175	100	4.60	56000	24000	7

High efficacy high pressure sodium lamp, long reliable lamp life.

Features

- High efficacy, high light output, energy efficient HPS lamps.
- Long reliable lamp life by superior quality and technology.
- Ra 17-25, CCT=2100K

Notes:

Warning / Caution notices: page 46

