


# EYE Clean Ace

(For use with Mercury ballast without ignitor.)

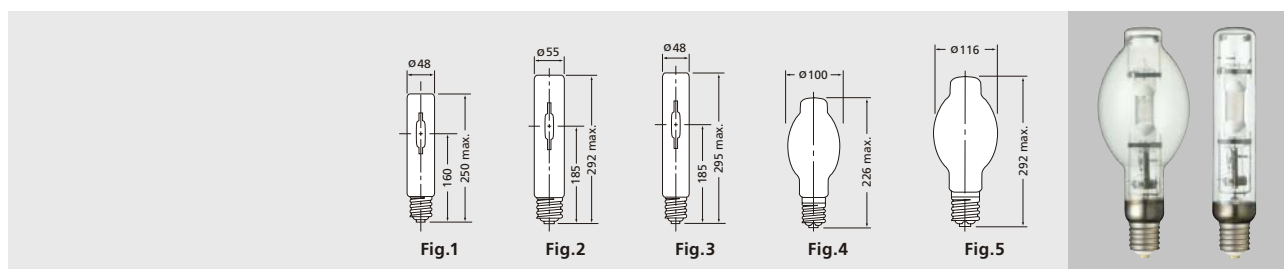

## PHYSICAL DATA AND CHARACTERISTICS

Type	Watts (W)	Bulb	Base	Std. Pkg. Qty.	M.O.L. (mm)	L.C.L. (mm)	Lamp		Approx. Initial Lumens (lm)	Ra	Rated Av. Life (hrs)	Burning Position	Fig. No.
							Voltage (V)	Current (A)					
<b>Tubular</b>													
MT250DL	250	T48	E40	12	250	160	130	2.13	18200V 14800H	90	10000V	Any	1
MT400DL/BH	400	T55	E40	12	292	185	135	3.25	29000	90	12000	BH±15°	2
MT400DL/BUD	400	T48	E40	12	295	185	135	3.25	32000	90	12000	BUD±15°	3
<b>BT Coated</b>													
MF250DL	250	BT100	E40	12	250	—	130	2.13	14500V 13500H	90	10000	Any	4
MF400DL	400	BT116	E40	12	292	—	135	3.25	24500V 23000H	90	12000	Any	5
<b>BT Clear</b>													
M250DL	250	BT100	E40	12	250	160	130	2.13	15500V 14500H	90	10000	Any	4
M400DL	400	BT116	E40	12	292	185	135	3.25	26500V 25000H	90	12000	Any	5

Notes: • For use in enclosed fixtures only.  
• Values in lamp voltage and lamp current stated in the above table may vary depending on supply voltage.

With its excellent colour rendering properties, this metal halide lamp features a light colour close to natural daylight.

### Features

- High colour temperature 6500K.
- High colour rendering Ra 90.
- The light is suitable for various retail applications, and signboards, as well as critical commercial and industrial colour applications including aquatic applications.
- Operates on standard high pressure mercury ballast without ignitor.

Notes:

Warning / Caution notices: page 35

