


# EYE Multi-Metal

(For use with CWA ballast.)

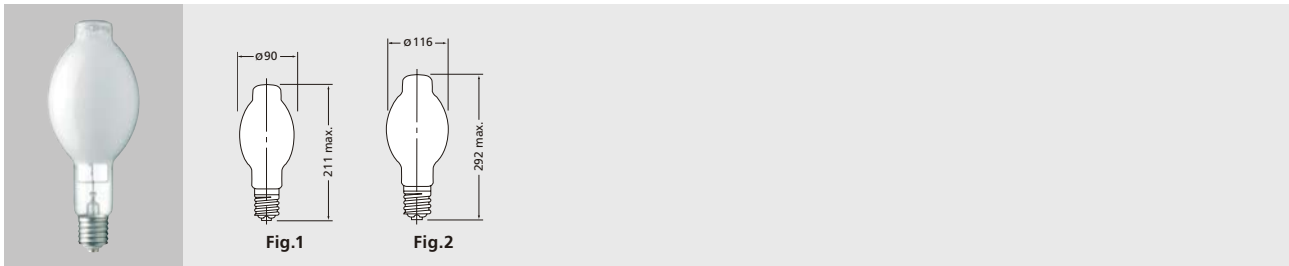

## PHYSICAL DATA AND CHARACTERISTICS

Type	Watts (W)	Bulb	Std. Pkg. Qty.	M.O.L. (mm)	L.C.L. (mm)	Lamp		Approx. Initial Lumens (lm)	Rated Av. Life (hrs)	Burning position	Fig. No.
						Voltage (V)	Current (A)				
<b>Coated</b>											
MF250X/U	250	BT90	12	211	—	130	2.13	20000	15000	Any	1
MF400X/U	400	BT116	12	292	—	135	3.25	36000	15000	Any	2
MF1000BX/U	1000	BT180	6	395	—	263	4.10	110000	9000	Any	—
MF400X/BUP	400	BT116	12	292	—	135	3.25	36000	15000	BU ± 15°	2
<b>Clear</b>											
M250X/U	250	BT90	12	211	131	130	2.13	21000	15000	Any	1
M400X/U	400	BT116	12	292	185	135	3.25	38000	15000	Any	2
M1000BX/U	1000	BT180	6	395	245	263	4.10	115000	9000	Any	—
M400X/BUP	400	BT116	12	292	185	135	3.25	38000	15000	BU ± 15°	2
<b>HIGH LUMEN TYPE</b>											
<b>Coated</b>											
MF400SX/BU	400	BT116	12	292	—	135	3.25	40000	20000	BU ± 15°	2
MF1000BSX/BU	1000	BT180	6	395	—	263	4.10	118000	9000	BU ± 15°	—
<b>Clear</b>											
M400SX/BU	400	BT116	12	292	185	135	3.25	42000	20000	BU ± 15°	2
M1000BSX/BU	1000	BT180	6	395	245	263	4.10	120000	9000	BU ± 15°	—

Notes: • For use in enclosed fixtures only.

Metal halide lamp for use with CWA (Constant Wattage Autotransformer) ballast for metal halide lamp without ignitor.

### Features

- Up to 120 lm/W, high efficacy.
- Long lamp life
- Various wattages and types are available.
- Shatterproof coated types are available. The coating on outer bulb prevents glass from shattering when broken.
- Coated: Ra 70, CCT=3800K
- Clear: Ra 65, CCT=4200K

### Notes:

Warning / Caution notices: page 35

